

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 16 TOWNSHIP 17 RANGE 2

DATE: 2-15-05

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 4-28-00


IN. S.P.C. E ZONE NAD '83

NAME: 17021605

N: 518512.9146(m)

E: 45237.9607(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

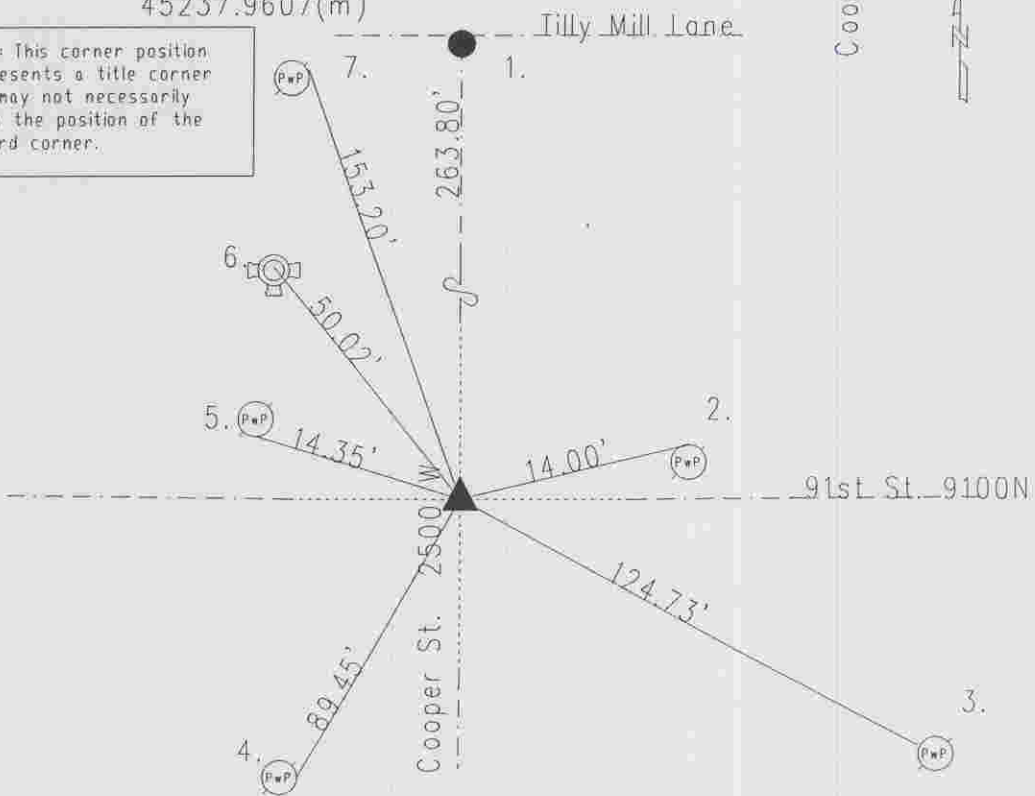

Hosbrook 11-12-1849 called no stone but witness: 10" lynn N 10 E 20 links, 20" beech S 20 W 43 links per Pike Township Legal Survey Book pg. 40. 9-28-81 called a railroad spike. Excavated by Wilcoxon 8-17-95 and a railroad spike was found at surface. Stone found 8" down. Harrison set. Re-tied 4-18-00 by Wilcoxon. Re-tied 2-15-05 by Wilcoxon.

17021605

| REF. | DISTANCE | DESCRIPTION |
|------|----------|---|
| 1. | 263.80' | Due N to mag nail at C/I of Tilly Mill Lane |
| 2. | 14.00' | PK nail N PwP#50-191Y 6"up |
| 3. | 124.73' | PK nail W PwP#49-191YA 12"up |
| 4. | 89.45' | PK nail E PwP#177-191 YA 8"up |
| 5. | 14.35' | PK nail S PwP#119-191YA |
| 6. | 50.02' | Top nut of fire hydrant |
| 7. | 153.20' | Mag nail w/bw F PwP#162-161Y 8"up |
| | | |
| | | |
| | | |